

2012 EAGLE CREEK ANNUAL REPORT

WATERSHED OUTLET MONITORING PROGRAM


(Preliminary Data)



Prepared for:
Lower Minnesota River Watershed District

By: SCOTT SWCD
Jordan, MN

Lower Minnesota River Watershed District



Introduction

Eagle Creek is a unique water resource in the metropolitan area. It is a Class 2A self-reproducing trout stream that originates at the Boiling Springs (an area considered sacred by the Mdewakanton Sioux Community) and outlets into the Minnesota River. Significant measures have been taken over the past couple of decades to prevent degradation of Eagle Creek, including diverting stormwater from the stream and establishing a 200-foot natural vegetative buffer along each side of the bank. These and other steps have helped to significantly minimize impacts from this rapidly growing suburban area.

The Eagle Creek monitoring station began in 1999 as part of the Metropolitan Council's Watershed Outlet Monitoring Program (WOMP). This program was designed and is currently managed by the Metropolitan Council, for the primary purpose of improving the ability to calculate pollutant loads to the Minnesota River. The Lower Minnesota River Watershed District (LMRWD) is the local funding partner for this station, and contracts with the Scott Soil and Water Conservation District (SWCD) to perform field-monitoring activities.

The monitoring station is located in the City of Savage near Highway 13 and Highway 101, approximately 0.8 miles upstream of the confluence with the Minnesota River. This report summarizes the results of precipitation and water quality for 2012 (Tables 1 and 2, respectively). This data is preliminary and is subject to change until the Metropolitan Council submits the final report for this period.

Samples

Samples are collected and analyzed for multiple parameters (see Table 2) during base flow conditions and storm events. Base flow samples are taken monthly during periods of time unaffected by rainfall or snowmelt events. A bottle is dipped directly into the stream and then taken to the Metropolitan Council Environmental Services Laboratory (lab) for analysis. Composite samples are collected automatically during rainfall or snowmelt events using a Sigma 900 Portable Sampler and Campbell CR10X datalogger. The sampler starts collecting water if the stream level (stage) rises above a predetermined activation stage which is set in the datalogger program. It continues to take a sample each time a fixed volume of water has passed the station. The sampler then shuts off automatically after 96 samples have been collected or the water level has dropped below the activation stage. The samples are then combined and brought to the lab for analysis. Fourteen composite samples and thirteen base flow grab samples were collected in 2012 (Figure 1).

Because of short holding times, *E. Coli* samples are not able to be analyzed directly from the composite sample. Instead, two separate *E. Coli* grab samples were taken directly from the stream when collecting composite samples and are included on Figure 1 as grab samples.

Flow

There are two means of measuring stage and flow at the WOMP station: a WaterLOG bubbler system (Series Model H-355 and 350) and Sontek Argonaut Shallow Water (SW) system. The bubbler system has been used since 1999 to measure stage. To determine the amount of flow related to stage, flow measurements are taken manually with a flow meter while the creek is at different stages. With this data, a stage:flow relationship can be applied to the datalogger program, which then continuously logs flow values as determined by the measured stage.

A Sontek Argonaut-SW was installed by the Metropolitan Council in 2008. This equipment calculates instantaneous flow based on the cross section, stage, and velocity of the water. This equipment was

determined necessary because of occasional backwater conditions caused by beaver dams or flooding of the Minnesota River. The bubbler system is not able to determine that the water is moving slower, so it automatically calculates higher flow as the stage rises. The Argonaut is able to adjust the flow as velocity changes, making the flow values more accurate, especially during backwater conditions.

Results

Many parameters are recorded continuously at the Eagle Creek WOMP station including stage, flow, conductivity, precipitation, and stream temperature. Water quality samples are collected monthly during base flow conditions and also during storm events. Monitoring data suggests that Eagle Creek consistently meets state water quality standards and ecoregion means¹, with the exception of bacteria, turbidity, and suspended solids (Table 2). The elevated levels of these parameters in winter is characteristic of this stream due to the fact that Eagle Creek is spring fed and does not freeze over in the winter. The open water attracts a large number of waterfowl, which results in higher bacteria, sediment, and turbidity levels than observed in summer months (Figures 2 - 4).

The current state turbidity standard will most likely be replaced with a Total Suspended Solids (TSS) standard in the near future. Currently, the turbidity standard for Class 2A waters is 10 NTUs. Because of inconsistencies with the method in which turbidity is measured, TSS is a potential surrogate for turbidity. The proposed TSS standard for Class 2A waters would likely state that no more than 10% of the samples shall exceed 10 mg/L. This year, Eagle Creek exceeded 10 mg/L in 38% of lab samples (Figure 2 and 3). All of the TSS exceedences were during events or winter months.

E. Coli counts improved in 2012. The *E. Coli* standard is applicable from April 1 – October 31 and is exceeded when greater than 10% of the samples exceed 1260 Colony Forming Units per 100 ml (CFU's) or the geometric mean of all values in a calendar month exceed 126 CFUs. None of the samples exceeded 1260 CFU's from April through October (Figure 4); however, from 2006 to 2012, the geometric mean of *E. Coli* exceeded 126 CFU's in the months of June and July (Figure 5).

It is important to note that conclusions based on monitoring data for Eagle Creek are influenced (i.e. biased) by the relative percentage of samples collected during and immediately after storm events. For instance, 14 of the 26 (54%) samples were collected during events, and 38% of samples exceeded TSS standards. This bias is a result of the monitoring protocols specifically used at the Eagle Creek station. As stated, these protocols were designed to enable the Metropolitan Council to calculate pollutant loads to the Minnesota River. In order to assign load values, it is best to collect many storm event samples. Different protocols are typically used for assessing whether or not a particular water body meets state water quality standards. Therefore, caution must be used when attempting to characterize the condition of Eagle Creek based on data collected through this project.

¹ There are seven ecoregions in Minnesota. Ecoregions are classified by geographic areas with similar plant communities, land use, soil, and geology. Eagle Creek is located in the North Central Hardwood Forest (NCHF) ecoregion. Each ecoregion has unique water quality goals as determined by historical monitoring of representative and minimally impacted reference streams within that ecoregion.

Table 1. Precipitation near Eagle Creek WOMP station.

Month	2012 Precipitation* (inches)	30 year precipitation average**
January	0.6	0.73
February	1.77	0.62
March	1.76	1.73
April	3.28	2.53
May	9.95	3.69
June	5.51	4.64
July	3.46	3.49
August	1.76	5.05
September	0.59	3.41
October	1.21	2.47
November	0.57	1.64
December	1.10	0.95
Total	31.57	30.95

*Precipitation data obtained from volunteer rain gauge monitor in Prior Lake.

** this 30 year average (normal) is from 1981-2010, National Climatic Data Center, Station: 214176 JORDAN 1 S, MN.

<http://www1.ncdc.noaa.gov/pub/data/normals/1981-2010/products/station/USC00214176.normals.text>

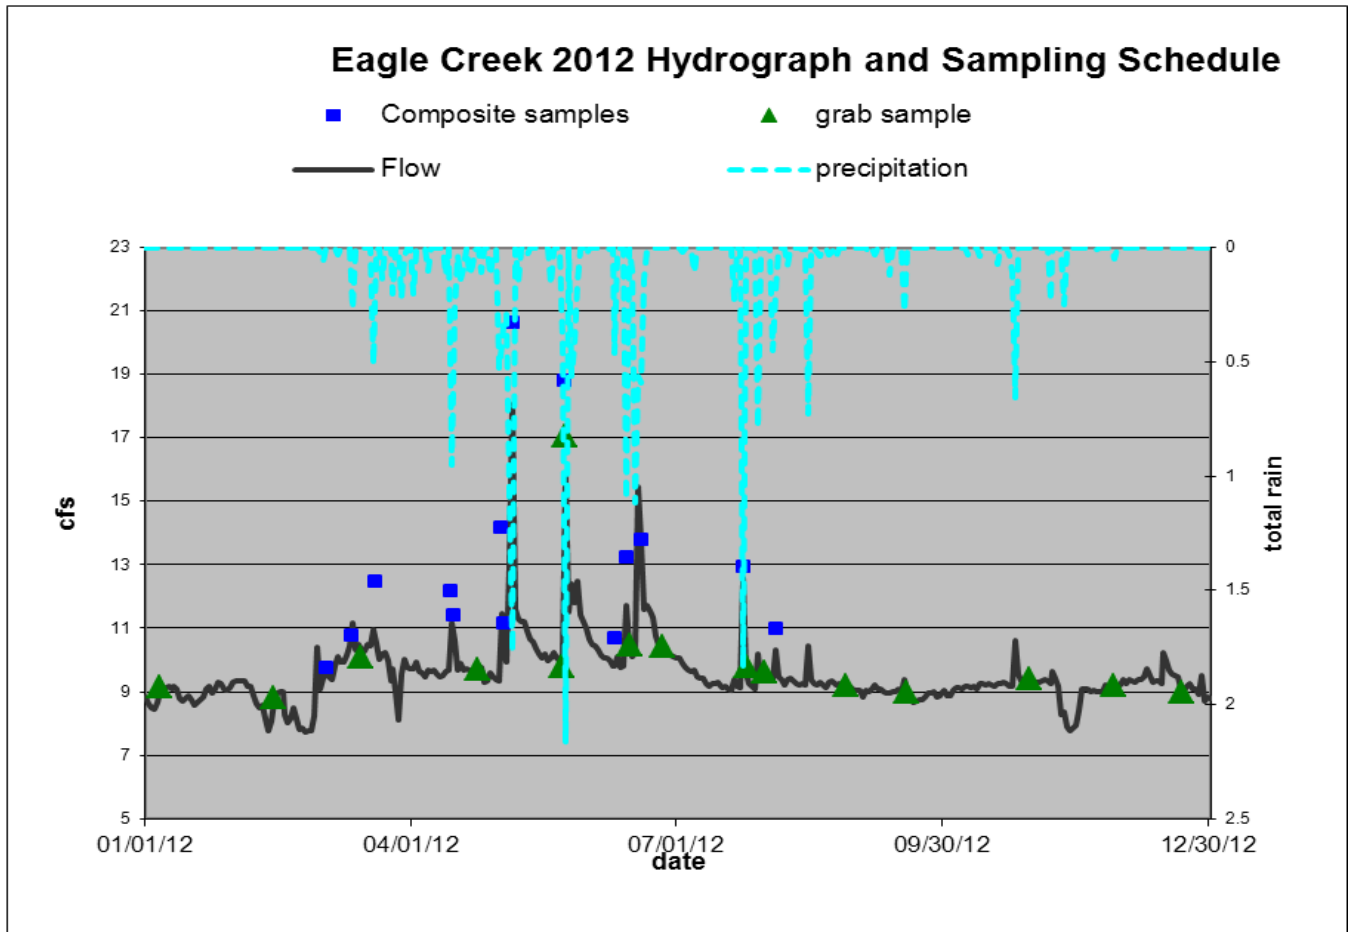


Figure 1. Flow, Precipitation, and Sample Schedule. Graph courtesy of MCES.

Table 2. Water quality **preliminary** results. Red, bolded text indicates exceedence of the state standard or NCHF ecoregion mean.

Parameter	MIN	25TH %	AVG	75TH %	MAX	MEDIAN	SAMPLES	Notes
Ammonia Nitrogen, Unfiltered (mg/L)	0.02	0.02	0.04	0.06	0.10	0.05	26	State standard of unionized Ammonia as N = .016 mg/L. Need to calculate N Ammonia to get unionized Ammonia as N.
COD (mg/L)	5.00	7.25	14.35	19.00	45.00	10.00	26	
Calcium (mg/L)	65.30	76.60	79.27	84.05	86.90	78.60	15	
Chloride (mg/L)	25.00	34.00	35.42	38.00	39.00	36.00	26	State standard = 230 mg/L.
Chlorophyll-a, % Pheo-Corrected	44.00	59.50	75.17	100.00	100.00	71.50	12	% Pheo-Corrected Average Of Result
Conductivity (mMHOs)	462.00	612.75	630.36	653.50	750.00	620.50	28	
Dissolved Oxygen (mg/L)	7.01	7.76	8.26	9.00	9.21	8.17	10	State standard = 7 mg/L.
E. Coli Bacteria Count (CFU/100ml)	6.00	40.50	119.93	117.75	675.00	105.00	15	State Standard = 126 organisms/100 ml as a geometric mean of not < 5 samples within any calendar month (Apr 1 – Oct 31)
Hardness (mg/L)	260.00	293.50	309.00	322.00	344.00	312.00	26	No state standard. Water above 180 mg/L considered very hard water.
Magnesium	24.10	26.80	27.98	29.38	30.80	27.60	15	
Nitrate (mg/L)	0.06	0.09	0.15	0.19	0.34	0.12	26	Ecoregion mean = 0.4-0.26 mg/L
Nitrite (mg/L)	0.03	0.03	0.03	0.03	0.03	0.03	26	Ecoregion mean = 0.4-0.26 mg/L
Ortho Phosphate as P, Filtered (mg/L)	0.01	0.01	0.01	0.01	0.02	0.01	24	
Pheophytin-a	0.00	0.00	0.00	0.00	0.00	0.00	12	
Sulfate (mg/L)	16.60	18.25	19.76	21.40	22.90	19.60	26	
Suspended Solids (mg/L)	1.00	3.25	15.04	20.00	56.00	7.00	26	Proposed Future Standard = 10 mg/L
Total Alkalinity (mg/L)	214.00	253.00	260.65	272.00	288.00	265.00	26	No state standard. 20 – 200 mg/L typical. Less than 10 mg/L indicate poor buffer.
Total Kjeldahl Nitrogen (mg/L)	0.16	0.26	0.38	0.47	0.88	0.33	26	
Total Organic Carbon (mg/L)	2.50	3.18	4.65	6.00	9.00	4.45	26	
Total Phosphorus (mg/L)	0.01	0.01	0.02	0.02	0.10	0.01	26	Ecoregion mean = 0.13 mg/L. EPA recommends less than 0.1 mg/L. These results are the unfiltered average of result.
Transparency Tube (cm)	25.00	47.25	70.82	100.00	100.00	81.00	28	
Lab Turbidity (NTRU)	2.00	5.00	10.20	12.50	31.00	6.00	25	State standard for trout waters = 10 NTU, however lab reports in NTRU. Not quite comparable.
Field Turbidity (FNU)	0.10	1.80	6.48	3.60	40.70	2.40	9	State standard for trout waters = 10 NTU, however lab reports in NTRU. Not quite comparable.
Volatile Suspended Solids (mg/L)	1.00	1.00	4.65	5.00	17.00	2.50	26	
pH (su)	7.57	7.63	7.72	7.75	7.97	7.67	4	State Standard = 6.5-8.5 su

mg/L = milligrams per liter
CFU = colony forming units

ug/L = micrograms per liter
NTU = nephelometric turbidity units

mMHO = micorseimens
su = standard units

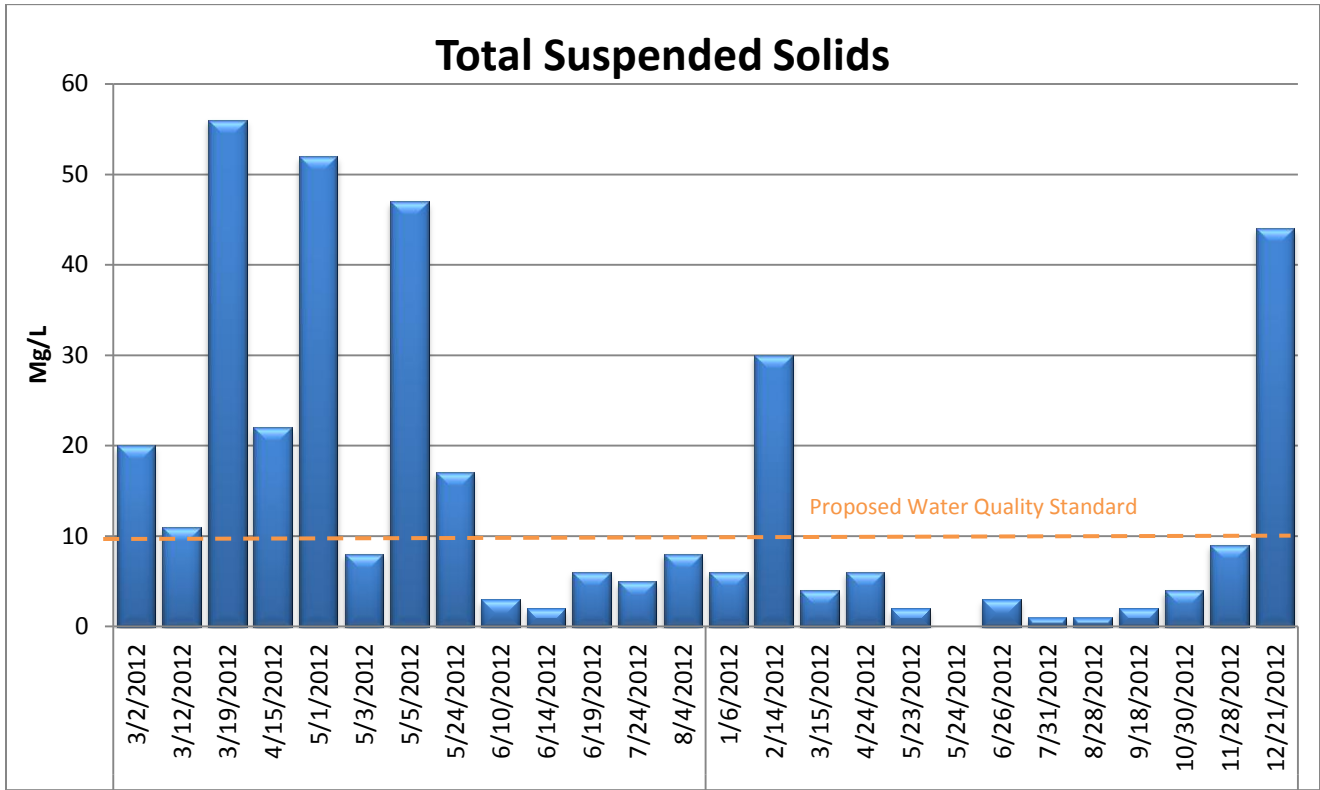


Figure 2. Proposed TSS State Standard for Class 2A Waters = 10 mg/L (no more than 10% exceedence).

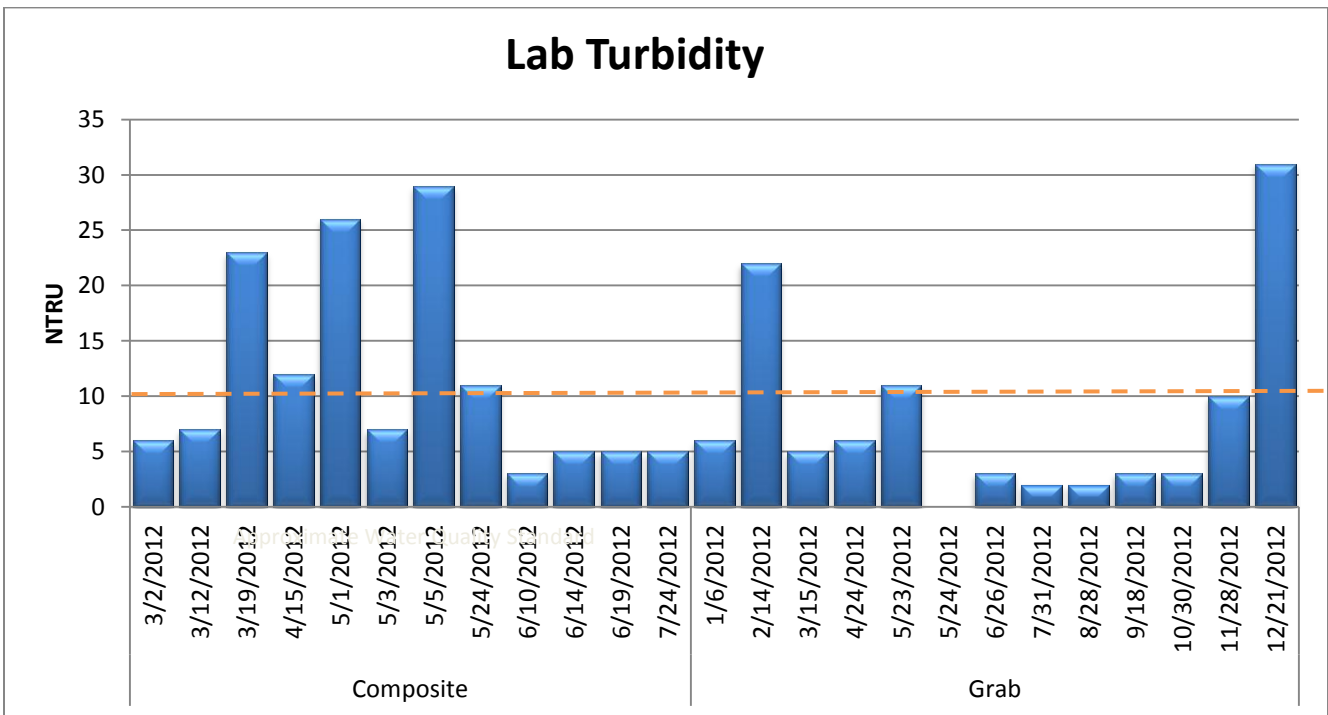


Figure 3. The orange line indicates an approximate standard. Because turbidity was measured in Nephelometric Turbidity Ratio Units (NTRU), rather than Nephelometric Turbidity Units (NTU), the standard of 10 NTU's cannot directly apply. Rather, it is an estimate.

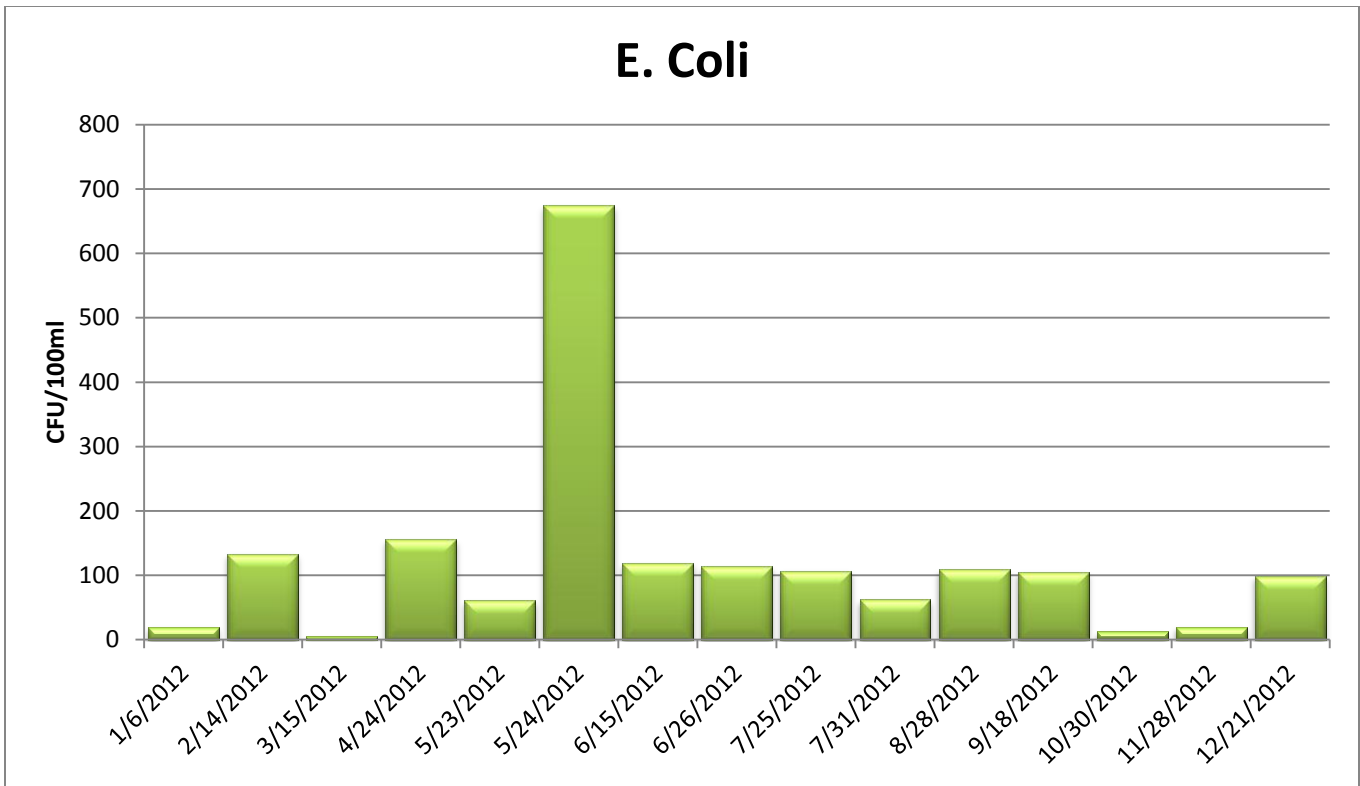


Figure 4. Presence of *E. Coli* in 2012 samples. *E. Coli* state standard for class 2A waters: “Not to exceed 126 organisms/100 ml as a geometric mean of not < 5 samples representative of conditions within any calendar month, nor shall more than 10% of all samples taken during any calendar month individually exceed 1,260 organisms per 100 ml. The standard applies only between April 1 and October 31.”

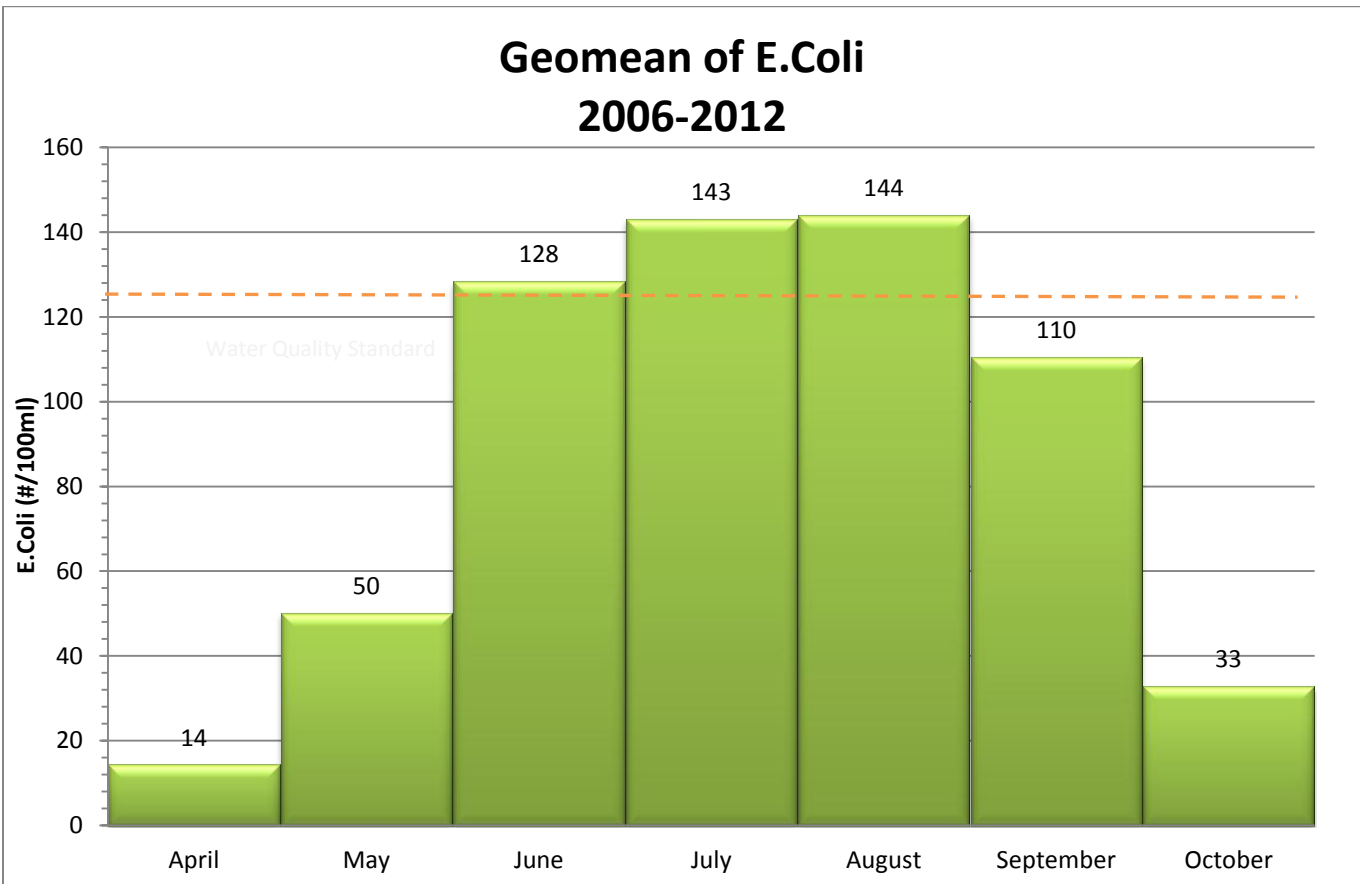


Figure 5. Geomean of *E. Coli* at Eagle Creek, 2006-2011. *E. Coli* state standard for class 2A waters: “Not to exceed 126 organisms/100 ml as a geometric mean of not < 5 samples representative of conditions within any calendar month, nor shall more than 10% of all samples taken during any calendar month individually exceed 1,260 organisms per 100 ml. The standard applies only between April 1 and October 31.”

